Technical specifications	Standard	Characteristic / result
Thickness swelling test	EN 13329	< 8% swelling
Abrasion test	EN 13329	AC3 - AC5
Board thickness	EN 13329	8 mm
Board density	EN 13329	> 850 kg/m ³
Stain resistance	EN 13329	Rating 5 (No visible change)
Cigarette test	EN 13329	Degree 5 (No visible change)
Fade resistance	EN 13329	Level 6 (No discoloration)
Fire classification	DIN 4102	Flame retardant B1
Roller castor chair resistance	EN 13329	No visible change
Simulated pushing of furniture leg	EN 13329	No visible change
Impact resistance	EN 13329	No visible change

UTILITY CLASS

Fit for use grading AC4/W32 As per EN 13329










General commercia

Installation method: Interlocking click system Panel dimension: 1288 mm x 192 mm x 8 mm

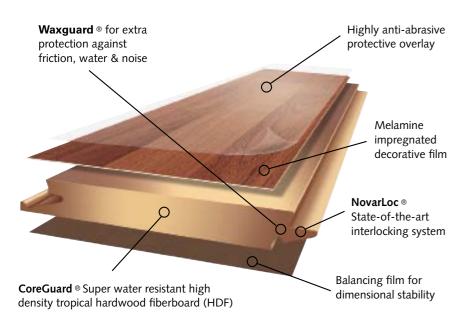





Stain resistant



easy to clean



cigarette burn



Stands up to wear and tear



Scratch



Impact resistant



DISTRIBUTOR / STOCKIST





household chemicals

FINfloor SA (Pty) Ltd.



need not be hacked before installation



resistant








dust-mites

Distributors nationwide • Enquiries: 0860 346 356 E-mail: finfloor@telkom.net www.finfloor.co.za • www.inovar.co.za





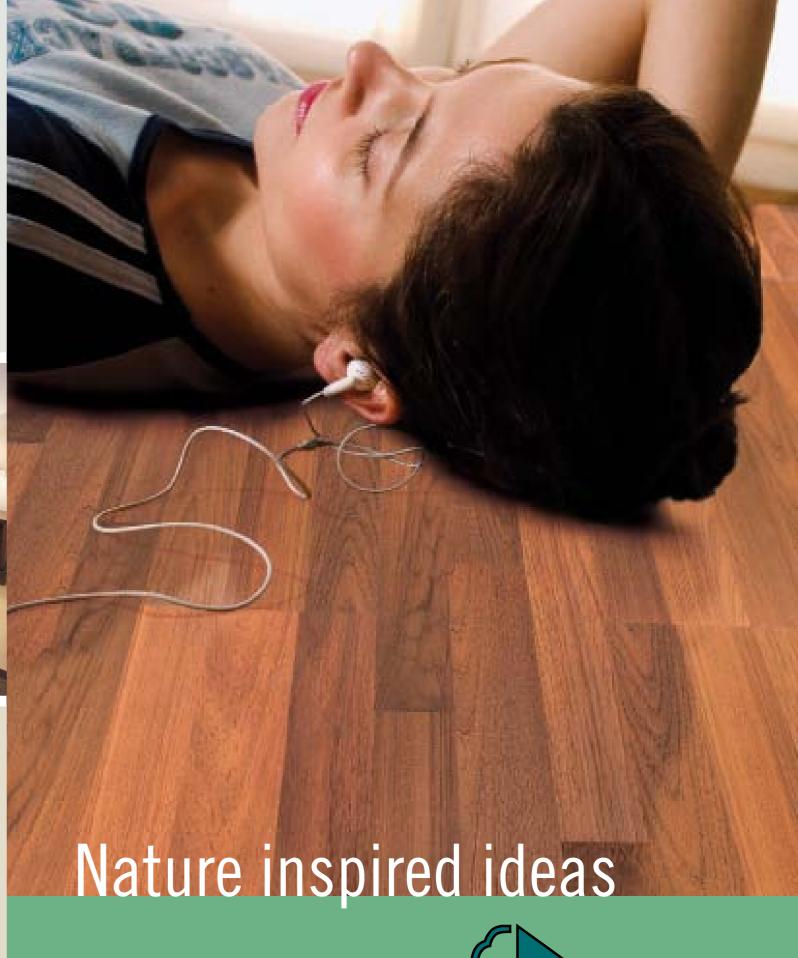

INOVAR FLOOR®



As a trendsetter and pioneer in laminate flooring, we constantly challenge ourselves to be in the forefrom of current design trends. Our range of laminate flooring helps to define your lifestyle, enhances the character of your home and cultivates a pleasant environment in your home and workplace. Our floors emulate the characteristic of natural wood texture and present an inspiring lifestyle.

With over 14 years of international experience and a solid 25 year manufacturers warranty plus a lifetime warranty against termites, INOVAR FLOOR® is manufactured to the highest standards, is easy to install and maintain and lasts for years.

Durable and impact resistant

INOVAR FLOOR® is manufactured from tropical hardwood material - making it stronger, more durable and longer lasting. No other imported brands have a hardwood content providing this advantage.

Superior water resistant quality

INOVAR FLOOR® core materials are made of superior water resistant tropical hardwood fibres making it the MOST water resistant laminate flooring you can find in the market.

Environment friendly.

Low formaldehyde emission for a cleaner and greener environment plus product manufactured from wood waste and harvested forests.





25 year manufacturer's warranty

As one of the first distributors of laminate flooring in South Africa and with over 14 years experience in supplying and fitting, INOVAR FLOOR® has long been regarded as the market leader in laminate flooring and thus, we are able to offer you a solid 25 year manufacturer's warranty against staining and surface wear-through.

Lifetime warranty against termites

As a responsible, environmentally aware manufacturer, we only use superior quality tropical hardwood materials from sustainable forests in our production. Thus we are able to offer you, the discerning buyer, a lifetime warranty against termites.

Commercial use

Our flooring has been well received by reputable developers and builders. This is proof of a global quality standard that will give you peace of mind that we as manufacturers can offer you. Our factory is committed to delivering the quality you deserve by investing in state-of-the-art machinery and technology to produce a range of superior water resistant laminate floors since 1996.






Flooring accessories

INOVAR FLOOR® offers you a complete flooring solution as a floor would not be complete without fine complementing accessories to customize your selection. Different types of profiles for various applications are available.

Profile range with matching designs: • Aluminium laminated with high resistant PVC • Inox anodized aluminium profile.



Adaptation profile For connecting INOVAR FLOOR® With adjacent lower surface (carpet, PVC etc.)



Transition profile For transition between floors of the same level.



End profile
For proper borders
of different floor
surfaces in front
of adjacent sills,



Staircase profile For staircase nosing cover at the edge between the riser and step.



Skirting
For covering
expansion gap
along the walls.



1/4 Round
For covering
expansion gap
along the walls
& cupboard
kickboards.